




SEAL SOURCE INC.™

HYDRAULIC SEALING COMPONENTS SPECIALISTS

ED - DIN Connector Rings - Inch

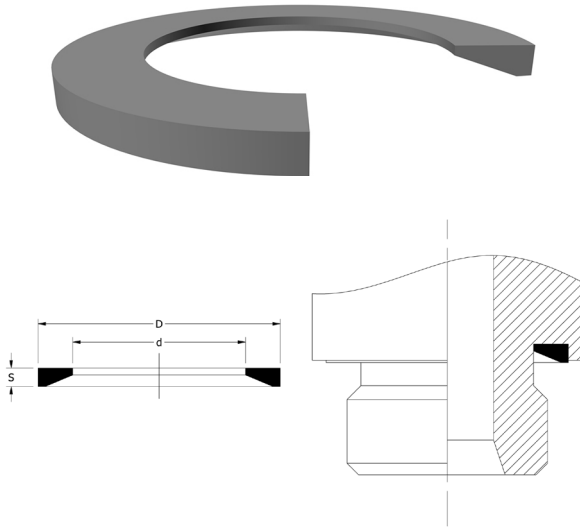

Standard Materials	Temperature Range
Nitrile	-22°F to +212°F (-30°C to +100°C)
Fluorocarbon	-4°F to +392°F (-20°C to +200°C)
Optional Material	Temperature Range
Ethylene-Propylene	-49°F to +302°F (-45°C to +150°C)

ED-Style sealing rings are mostly used to seal threaded tube connections and fittings. As torque is applied to the connector, the elastomeric seal material is compressed to form a positive sealing line, and its special geometry keeps it from twisting during installation.

Alternate Materials: For applications that may require an alternate material, please contact our customer service department. Other sizes available on request.

Part Number	For Male Metric Thread	For Male Thread BSPP	D (mm)	d (mm)	S (mm)
ED8X1X	M8 x 1		9.90	6.50	1.00
ED10X1X	M10 x 1	G 1/8 A	11.90	8.40	1.00
ED12X1.5X	M12 x 1.5		14.40	9.80	1.50
ED14X1.5X	M14 X1.5	G 1/4 A	16.50	11.60	1.50
ED16XX1.5X	M16 X 1.5		18.90	13.80	1.50
ED3/8X		G 3/8 A	18.90	14.70	1.50
ED18X1.5X	M18 X 1.5		20.90	15.70	1.50
ED20X1.5X	M20 X 1.5		22.90	17.80	1.50
ED1/2X		G 1/2 A	23.90	18.50	1.50
ED22X1.5X	M22 X 1.5		23.30	19.60	1.50
ED26X1.5X	M26 x 1.5	G 3/4 A	29.20	23.90	1.50
ED26X1.5X	M27 X 2	G 3/4 A	29.20	23.90	1.50
ED33X2X	M33 X 2	G 1 A	35.70	29.70	2.00
ED42X2X	M42 X 2	G 1 1/4 A	45.80	38.80	2.00
ED48X2X	M48 X2	G 1 1/2 A	50.70	44.70	2.00
ED60X2X		G 2 A	56.30	67.00	3.20