




SEAL SOURCE INC.
HYDRAULIC SEALING COMPONENTS SPECIALISTS

OPTIONAL REPLACEMENT PARTS FOR CATERPILLAR EQUIPMENT



Standard Material	Temperature Range	Compressive Strength	Surface Speed
Steel/PTFE/Lead	-328°F to +536°F -200°C to +280°C	44 000 psi (3035 bar)	<8.2 ft/s (2.5 m/s) dry <33 ft/s (10 m/s) lubricated

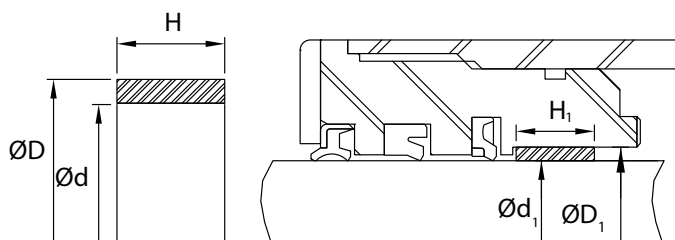

Rod bearings are self-lubricating, metal-backed plain bearings with very good wear and friction performance over a wide range of loads, speeds and temperature conditions. They are suitable for linear, oscillating and rotating movements.

Rod Bearings

Ref.Number	Description
CAT-0931815	ROD BEARING
CAT-0931822	ROD BEARING
CAT-1140751	ROD BEARING
CAT-1140752	ROD BEARING
CAT-0964402	ROD BEARING
CAT-0964430	ROD BEARING
CAT-0965625	ROD BEARING
CAT-0995572	ROD BEARING
CAT-1052575	ROD BEARING
CAT-1140750	ROD BEARING
CAT-1140751	ROD BEARING
CAT-1140752	ROD BEARING
CAT-1140753	ROD BEARING
CAT-1140754	ROD BEARING
CAT-1140755	ROD BEARING
CAT-1140756	ROD BEARING
CAT-1140757	ROD BEARING
CAT-1140758	ROD BEARING

Ref.Number	Description
CAT-1140760	ROD BEARING
CAT-1140761	ROD BEARING
CAT-1140762	ROD BEARING
CAT-1140763	ROD BEARING
CAT-1211574	ROD BEARING
CAT-1211607	ROD BEARING
CAT-1289260	ROD BEARING
CAT-1289261	ROD BEARING
CAT-1289262	ROD BEARING
CAT-1505839	ROD BEARING
CAT-1559100	ROD BEARING
CAT-1652575	ROD BEARING
CAT-1915644	ROD BEARING
CAT-3232465	ROD BEARING
CAT-3232467	ROD BEARING
CAT-3232470	ROD BEARING
CAT-3461758	ROD BEARING
CAT-3512182	ROD BEARING

For pricing informaton, please contact our customer service department.

(503)-281-0020 • info@sealsourceinc.com
16027 NE Cameron blvd. • Portland • Oregon • 97230
www.sealsourceinc.com